

Catalog No.	Finish	Mounting	Lamp
37104WH 37104BK	White Black	ProSpec® 120V/277V track systems only. Not compatible with recessed track.	20W PAR20 CMH (M156) E26 medium base Not included

## Features

- Track Attachment Fitting:** Molded polycarbonate, rotates into track.
- Locking Lever:** Steel pin. Locks and detaches unit.
- Track Adaptor Housing:** Die-cast aluminum.
- Ballast Housing:** Extruded aluminum housing with die-cast aluminum end caps.
- Ballast:** Electronic HID.
- Tension Pivot Mounts:** Allows for 350° horizontal and 180° vertical rotation with tensioned mounts for controlled aim.
- Lamp Housing:** Die-cast aluminum with cool-grip® insulation band; a high temperature silicone rubber which allows aiming adjustments while fixture is on. Integral color.
- Lampholder:** Medium base 5kV pulse rated glazed porcelain body socket with plated nickel screw shell and lamp contacts; 18AWG SEW-2 leads encased in fiberglass sleeving.
- Cowl:** Painted steel; retaining ring included to hold accessory in place.

## Accessories

Holder: Integral, holds one accessory  
 Diffusion/ Special Filters: AF25 series  
 Color Filters: ADF25 series  
 Louver (Hex Cell): AL25HC

## Electrical

### Electronic Ballast (Thermally Protected)

**Input Voltage:** 120V/277V  
**Power Factor:** >0.99  
**Input Power:** 24W  
**Max Input Current:** 0.20A@120V/0.09A@277V

**Total Harmonic Distortion:** <10%  
**ANSI Code:** M (C) 156  
 Do not use on dimming circuit

## Finish

All painted finishes are baked powder or enamel.

## Markings

U.L., c.U.L.

## Job Information

## Type:

**Job Name:**

**Cat. No.:**

**Lamp(s):**


**Notes:**

## Aiming Angle:

**L** Beam length  
**W** Beam Width  
**C** Distance to center beam  
**D** Distance  
**A** Aiming Angle  
**FC** Footcandles

**L** and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.  
 CBCP = Center Beam Candle Power.

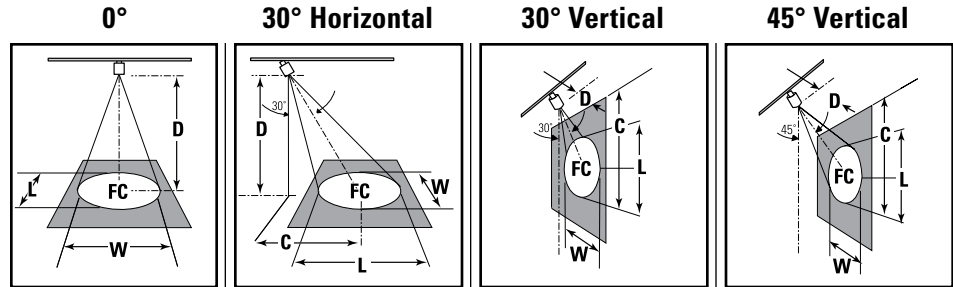

Lamp	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
 GE CMH20PAR20/SP	 8°	13000	7500	8'	203	1.1'	1.1'	8'	4.6'	132	1.5'	1.3'	3'	5.2'	181	1.7'	0.8'	4'	4.0'	287	1.1'	0.8'
				10'	130	1.4'	1.4'	10'	5.8'	84	1.9'	1.6'	4'	6.9'	102	2.3'	1.1'	5'	5.0'	184	1.4'	1.0'
				12'	90	1.7'	1.7'	12'	6.9'	59	2.2'	1.9'	5'	8.7'	65	2.8'	1.4'	6'	6.0'	128	1.7'	1.2'
				14'	66	2.0'	2.0'	14'	8.1'	43	2.6'	2.3'	6'	10.4'	45	3.4'	1.7'	7'	7.0'	94	2.0'	1.4'
 GE CMH20PAR20/FL	 25°	3750	7500	6'	104	2.7'	2.7'	6'	3.5'	68	3.6'	3.1'	2'	3.5'	117	4.2'	1.8'	3'	3.0'	147	2.8'	1.9'
				8'	59	3.5'	3.5'	8'	4.6'	38	4.8'	4.1'	3'	5.2'	52	6.2'	2.7'	4'	4.0'	83	3.7'	2.5'
				10'	38	4.4'	4.4'	10'	5.8'	24	6.0'	5.1'	4'	6.9'	29	8.3'	3.5'	5'	5.0'	53	4.7'	3.1'
				12'	26	5.3'	5.3'	12'	6.9'	17	7.2'	6.1'	5'	8.7'	19	10.4'	4.4'	6'	6.0'	37	5.6'	3.8'

## Job Information

## Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2008 Philips Group • A1008